

icore

Innovation to the Core



iPlus Camera Link Splitter

Key Features

- Camera Link Base/Medium/Full Configuration
- Standard Cameralink Cable
- Camera clock rate up to 85MHz
- Interfaces one camera to two/three frame grabbers
- PoCL Compliant

iPLUS Camera Link Splitter

Specifications

iPLUS Series	IPLUS-CLS-SF2	IPLUS-CLS-SF4	iPLUS-CLS-MF2	IPLUS-CLS-MF3
Output channel	2CH	4CH	2CH	3CH
Camera Link Configuration	Camera Link Base/Medium/Full			
Pixel Clock	20 – 85 MHz			
Connector Type	SDR 26 - PoCL compliant		MDR 26 - PoCL compliant	
Operating Temperature	0°C – 50°C			
Power Supply	Power adapter (not included) or PoCL compliant			
Power Consumption	Typ. 3W	Typ. 3W	Typ. 2W	Typ. 3W
Weight	180g	180g	180g	500g

Connector Specification

Plug (User) : Molex 39012020 (5557-02R)	Receptacle : Molex 26013114 (5569-02A2)
	

Mechanical Dimensions

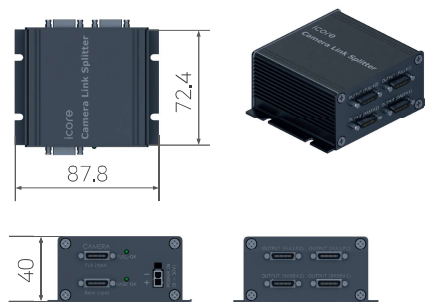


Figure 1 iPLUS-CLS-SF2

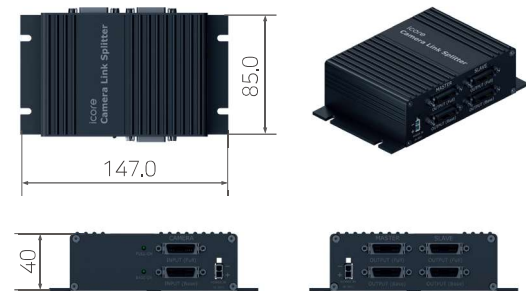


Figure 2 iPLUS-CLS-MF2

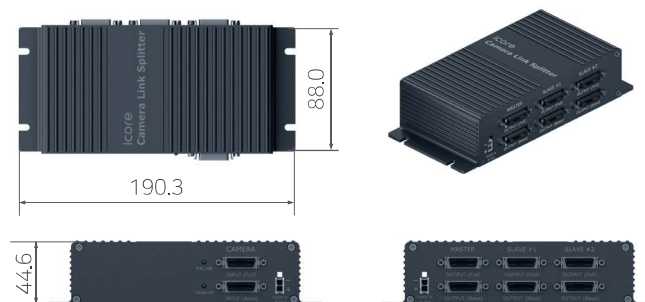


Figure 3 iPLUS-CLS-MF3